



TAYLOR II - TAYLOR III. ASC

CHANGEMENT DE CONFIGURATION PAR RESISTANCE

Configuration change Resistor

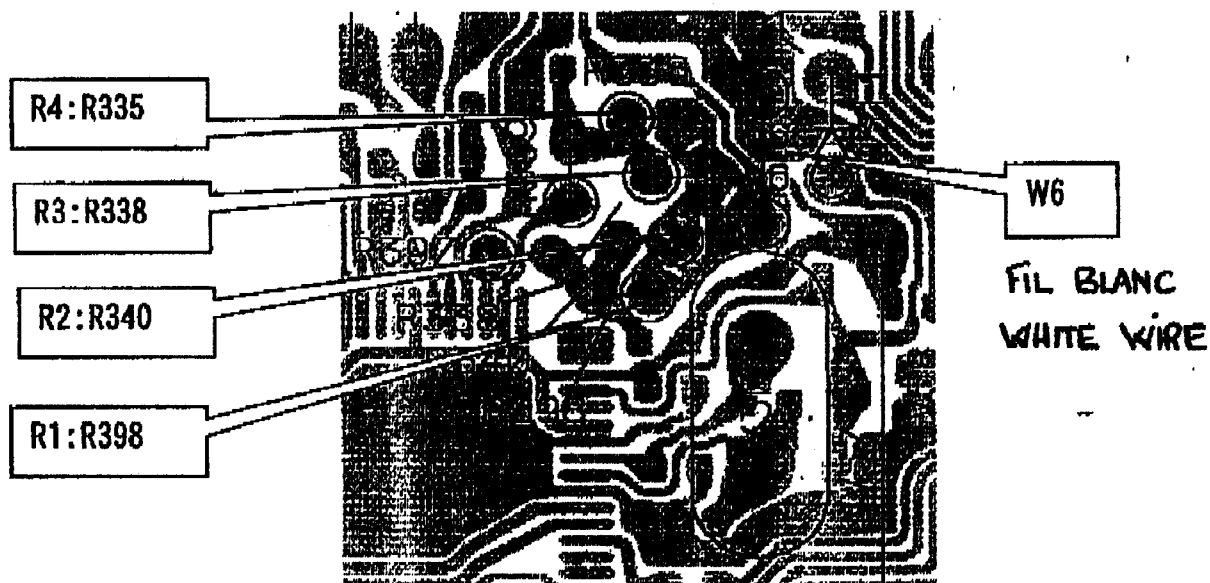

OPERATION	R1	R2	R3	R4	W6	CONFIGURATION
	Pas de Coupure/ No cut					40 ch. 4W. AM/FM
	X	X				12 ch. 1W AM - 80 ch 4W. FM
	X	X				12 ch. 1W. AM. 40 ch 4W FM
	X	X				40 ch. 1W AM. 40 ch 4W. FM
	X	X				40 ch. 4W. FM
	X	X	X	X		40 ch. 4W. FM (LWK) + 40 ch 4W. FM (CEPT)
			X			40 ch. 4W. AM. 40 ch. 4W. FM (- 5 kHz)
					X	120 ch. 4W AM/FM.

OCT 04